




Features

- It is a pellet type thermal links corresponding to RoHS.
- This thermal links adopted metal casing and sense temperature material of organic compound pellet.
- It is non-return type of thermal links. It means even if the ambient temperature falls after the thermal links operates but never re-connection.
- 169 substance of very high concern (SVHC) specified by the REACH rule is not used.(169 substances are published on June 20,2016)

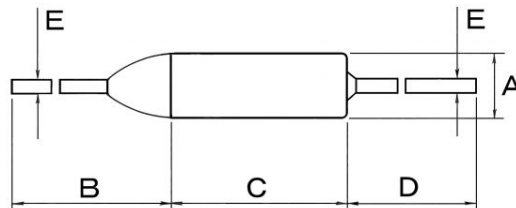

Lead length		Dimensions (mm)				
		A	B	C	D	E
Regular	LE□T	4.0±0.1	20±3.0	10.1±0.3	35±3	1.0±0.1
Long	LE□T-L	4.0±0.1	38±3.0	10.1±0.3	35±3	1.0±0.1

Specification

Type No.	Rated functioning temperature Tf (°C)	Functioning temperature (°C)	Holding temperature Th (°C)	Maximum use temperature (°C)	Maximum temperature limit Tm (°C)	Electrical rating	
						Ampere (A)	Voltage (V)
LE070T	73	71±2	50	45	150	10	AC250
LE073T	77	74±2	50	45	150	10	AC250
LE080T	84	80±2	50	50	150	10	AC250
LE090T	94	91+3,-2	65	60	150	10	AC250
LE095T	99	95±2	71	65	150	10	AC250
LE108T	113	109±2	85	80	150	10	AC250
LE117T	121	117±3	95	90	160	10	AC250
LE124T	128	124±3	102	95	160	10	AC250
LE128T	133	129+3,-2	105	95	160	10	AC250

LE138T	142	138±3	110	100	160	10	AC250
LE152T	157	152±2	130	120	175	10	AC250
LE169T	172	167±2	145	135	190	10	AC250
LE189T	192	189±3	165	135	300	10	AC250
LE213T	216	213±2	190	135	300	10	AC250

Safety standard information

Type No.	Safety standard approval					
	PSE	UL	C-UL	VDE	CCC	KC
LE070T	JET5823-32001-2001	E73591	E73591	40017818	2008010205276926	SU05028-8032
LE073T	JET5823-32001-2001	E73591	E73591	40017818	2008010205276926	SU05028-8032
LE080T	JET5823-32001-2002	E73591	E73591	40017818	2008010205276926	SU05028-8032
LE090T	JET5823-32001-2002	E73591	E73591	40017818	2008010205276926	SU05028-8032
LE095T	JET5823-32001-2002	E73591	E73591	40017818	2008010205276926	SU05028-8032
LE108T	JET5823-32001-2003	E73591	E73591	40017818	2008010205276926	SU05028-8033
LE117T	JET5823-32001-2004	E73591	E73591	40017818	2008010205276926	SU05028-8034
LE124T	JET5823-32001-2004	E73591	E73591	40017818	2008010205276926	SU05028-8034
LE128T	JET5823-32001-2004	E73591	E73591	40017818	2008010205276926	SU05028-8034
LE138T	JET5823-32001-2005	E73591	E73591	40017818	2008010205276926	SU05028-8034
LE152T	JET5823-32001-2005	E73591	E73591	40017818	2008010205276926	SU05028-8034
LE169T	JET5823-32001-2006	E73591	E73591	40017818	2008010205276926	SU05028-8035
LE189T	JET5823-32001-2007	E73591	E73591	40017818	2008010205276926	SU05028-8035
LE213T	JET5823-32001-2008	E73591	E73591	40017818	2008010205276926	SU05028-8036

- Functioning temperature is measured with silicone oil bath of which temperature is increased at the rate of 1°C/min. Detecting current is 0.1A or less.
- Please feel free to contact us in regard of the details of safety standard approvals.